


S4 CR 5 C

SERII POMPE INOX



Pump Type	Motor		Dimensions (mm)					Total Weight (kg)
			Connection			E	C	
	Type	KW	A	B	F			
S4 CR 5 C 01/07	S095MC/01-M	0.75	667	262	96	405	95	14.9
S4 CR 5 C 01/07	S095MC/01-T	0.75	689	304	96	385	95	13.3
S4 CR 5 C 1.5/09	S095MC/1.5-M	1.1	776	346	96	430	95	16.6
S4 CR 5 C 1.5/09	S095MC/1.5-T	1.1	751	346	96	405	95	15.3
S4 CR 5 C 02/11	S095MC/02-M	1.5	848	388	96	460	95	18.5
S4 CR 5 C 02/11	S095MC/02-T	1.5	833	409	96	424	95	16.6
S4 CR 5 C 03/12	S095MC/03-M	2.2	992	430	96	562	95	23.5
S4 CR 5 C 03/12	S095MC/03-T	2.2	890	430	96	460	95	18.6
S4 CR 5 C 03/14	S095MC/03-M	2.2	1034	472	96	562	95	24.1
S4 CR 5 C 03/14	S095MC/03-T	2.2	932	472	96	640	95	19.2
S4 CR 5 C 03/15	S095MC/03-M	2.2	1055	493	96	562	95	24.4
S4 CR 5 C 03/15	S095MC/03-T	2.2	953	493	96	460	95	19.5
S4 CR 5 C 04/17	S095MC/04	3.0	1053	535	96	518	95	22.9
S4 CR 5 C 04/19	S095MC/04	3.0	1095	577	96	518	95	23.5
S4 CR 5 C 04/21	S095MC/04	3.0	1137	619	96	518	95	24.1
S4 CR 5 C 5.5/23	S095MC/5.5	4.0	1241	661	96	580	95	27.8
S4 CR 5 C 5.5/26	S095MC/5.5	4.0	1304	724	96	580	95	28.7
S4 CR 5 C 7.5/29	S095MC/7.5	5.5	1470	787	96	683	95	33
S4 CR 5 C 7.5/32	S095MC/7.5	5.5	1533	850	96	683	95	33.9
S4 CR 5 C 7.5/35	S095MC/7.5	5.5	1596	913	96	683	95	34.8
S4 CR 5 C 7.5/37	S095MC/7.5	5.5	1638	955	96	683	95	35.4
S4 CR 5 C 7.5/39	S095MC/7.5	5.5	1680	997	96	683	95	36
S4 CR 5 C 10/41	S145MC/10	7.5	1799	1039	96	760	145	39.1
S4 CR 5 C 10/43	S145MC/10	7.5	1841	1081	138	760	145	39.7
S4 CR 5 C 10/45	S145MC/10	7.5	1883	1123	138	760	145	40.3
S4 CR 5 C 10/47	S145MC/10	7.5	1925	1165	138	760	145	40.9
S4 CR 5 C10/49	S145MC/10	7.5	1967	1207	138	760	145	41.5
S4 CR 5 C 10/52	S145MC/10	7.5	2030	1270	138	760	145	42.4

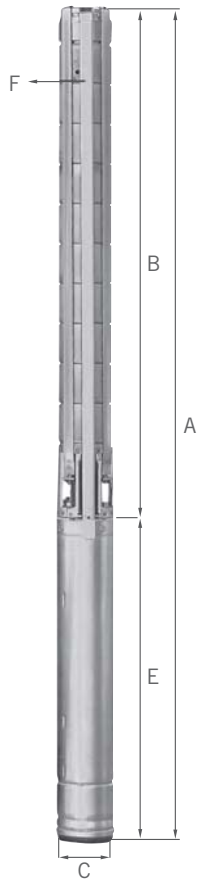