


S4 CR 8 D



Pump Type	Motor		Dimensions (mm)					Total Weight (kg)
			Connection			E	C	
	Type	KW	A	B	F			
S4 CR 8 D 1.5/05	S095MC/1.5-M	1.1	845	415	96	430	95	16.27
S4 CR 8 D 1.5/05	S095MC/1.5-T	1.1	820	415	96	405	95	14.97
S4 CR 8 D 02/07	S095MC/02-M	1.5	953	493	96	460	95	18.57
S4 CR 8 D 02/07	S095MC/02-T	1.5	839	415	96	424	95	16.67
S4 CR 8 D 03/09	S095MC/03-M	2.2	1265	703	96	562	95	24.27
S4 CR 8 D 03/09	S095MC/03-T	2.2	1163	703	96	460	95	19.57
S4 CR 8 D 04/12	S095MC/04-T	3.0	1221	703	96	518	95	23.67
S4 CR 8 D 5.5/15	S095MC/5.5-T	400	1410	830	96	580	95	28.27
S4 CR 8 D 7.5/18	S095MC/7.5-T	5.5	1638	955	96	683	95	33.17
S4 CR 8 D 7.5/21	S095MC/7.5-T	5.5	1773	1090	96	683	95	34.67
S4 CR 8 D 7.5/25	S095MC/7.5-T	5.5	1933	1250	96	683	95	36.67
S4 CR 8 D 10/30	S095MC/10-T	7.5	2080	1460	138	620	95	63.77
S4 CR 8 D 12.5/32	S145MC/12.5	9.2	2192	1542	138	650	145	70.77
S4 CR 8 D 12.5/35	S145MC/12.5	9.2	2310	1660	138	650	145	72.27
S4 CR 8 D 12.5/37	S145MC/12.5	9.2	2403	1753	138	650	145	73.27
S4 CR 8 D 15/39	S145MC/15	11	2535	1835	138	700	145	79.27
S4 CR 8 D 15/41	S145MC/15	11	2569	1869	138	700	145	80.27
S4 CR 8 D 15/44	S145MC/15	11	2747	2047	138	700	145	81.77
S4 CR 8 D 17.5/47	S145MC/17.5	13	2884	2134	138	750	145	87.27
S4 CR 8 D 17.5/50	S145MC/17.5	13	3053	2303	138	750	145	88.77
S4 CR 8 D 20/54	S145MC/20	15	3267	2467	138	800	145	92.77
S4 CR 8 D 20/58	S145MC/20	15	3813	3013	138	800	145	94.77
S4 CR 8 D 20/62	S145MC/20	15	3929	3129	138	800	145	96.77
S4 CR 8 D 20/66	S145MC/20	15	4149	3349	138	800	145	98.77

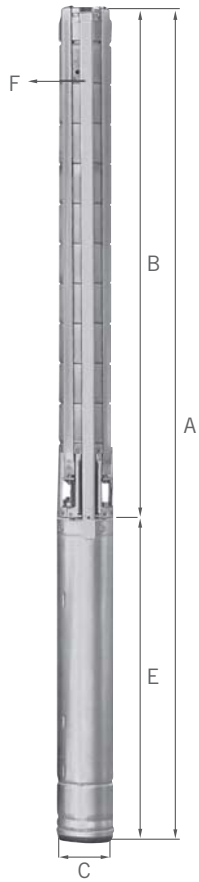