



S6 CR 17 A

SERII POMPE INOX

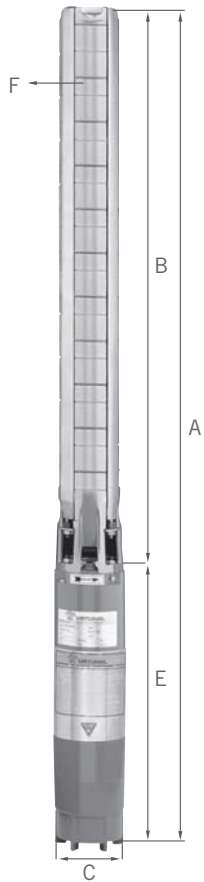

Pump Type	Motor		Dimensions (mm)					Total Weight (kg)
			Connection			E	C	
	Type	KW	A	B	F			
S6 CR 17 A 03/02	S095MC/03-T	2.2	874	414	134	460	95	19.2
S6 CR 17 A 04/03	S095MC/04-T	3	998	480	134	518	95	23.6
S6 CR 17 A 5.5/04	S095MC/5.5-T	4	1126	546	134	580	95	283
S6 CR 17 A 7.5/05	S095MC/7.5-T	5.5	1295	612	134	683	95	33.3
S6 CR 17 A 7.5/06	S095MC/7.5-T	5.5	1361	678	134	683	95	34.4
S6 CR 17 A 10/07	S145MC/10	7.5	1364	744	134	620	145	61.5
S6 CR 17 A 10/08	S145MC/10	7.5	1430	810	134	620	145	64.0
S6 CR 17 A 10/09	S145MC/10	7.5	1496	876	134	620	145	65.5
S6 CR 17 A 12.5/10	S145MC/12.5	9.2	1592	942	134	650	145	73.0
S6 CR 17 A 12.5/11	S145MC/12.5	9.2	1658	1008	134	650	145	74.0
S6 CR 17 A 15/12	S145MC/15	11	1774	1074	134	700	145	80.5
S6 CR 17 A 15/13	S145MC/15	11	1840	1140	134	700	145	82.0
S6 CR 17 A 17.5/14	S145MC/17.5	13	1956	1206	134	750	145	87.5
S6 CR 17 A 17.5/15	S145MC/17.5	13	2022	1272	134	750	145	89.0
S6 CR 17 A 20/16	S145MC/20	15	2138	1338	134	800	145	92.5
S6 CR 17 A 20/17	S145MC/20	15	2204	1404	134	800	145	94.0
S6 CR 17 A 20/18	S145MC/20	15	2270	1470	134	800	145	96.4
S6 CR 17 A 25/19	S145MC/25	18.5	2406	1536	134	870	145	110.0
S6 CR 17 A 25/20	S145MC/25	18.5	2472	1602	134	870	145	111.6
S6 CR 17 A 25/21	S145MC/25	18.5	2538	1668	134	870	145	113.2
S6 CR 17 A 25/22	S145MC/25	18.5	2604	1734	134	870	145	114.8
S6 CR 17 A 30/23	S145MC/30	22	2770	1800	134	970	145	128.4
S6 CR 17 A 30/24	S145MC/30	22	2836	1866	134	970	145	130.0
S6 CR 17 A 30/25	S145MC/30	22	2902	1932	134	970	145	131.6
S6 CR 17 A 30/26	S145MC/30	22	2968	1998	134	970	145	133.2
S6 CR 17 A 35/27	S145MC/35	26	3124	2064	134	1060	145	143.8
S6 CR 17 A 35/28	S145MC/35	26	3190	2130	134	1060	145	145.4
S6 CR 17 A 35/29	S145MC/35	26	3256	3196	134	1060	145	147.0
S6 CR 17 A 35/30	S145MC/35	26	3322	2262	134	1060	145	148.6
S6 CR 17 A 40/33	S145MC/40	30	3600	2460	134	1140	145	176.4

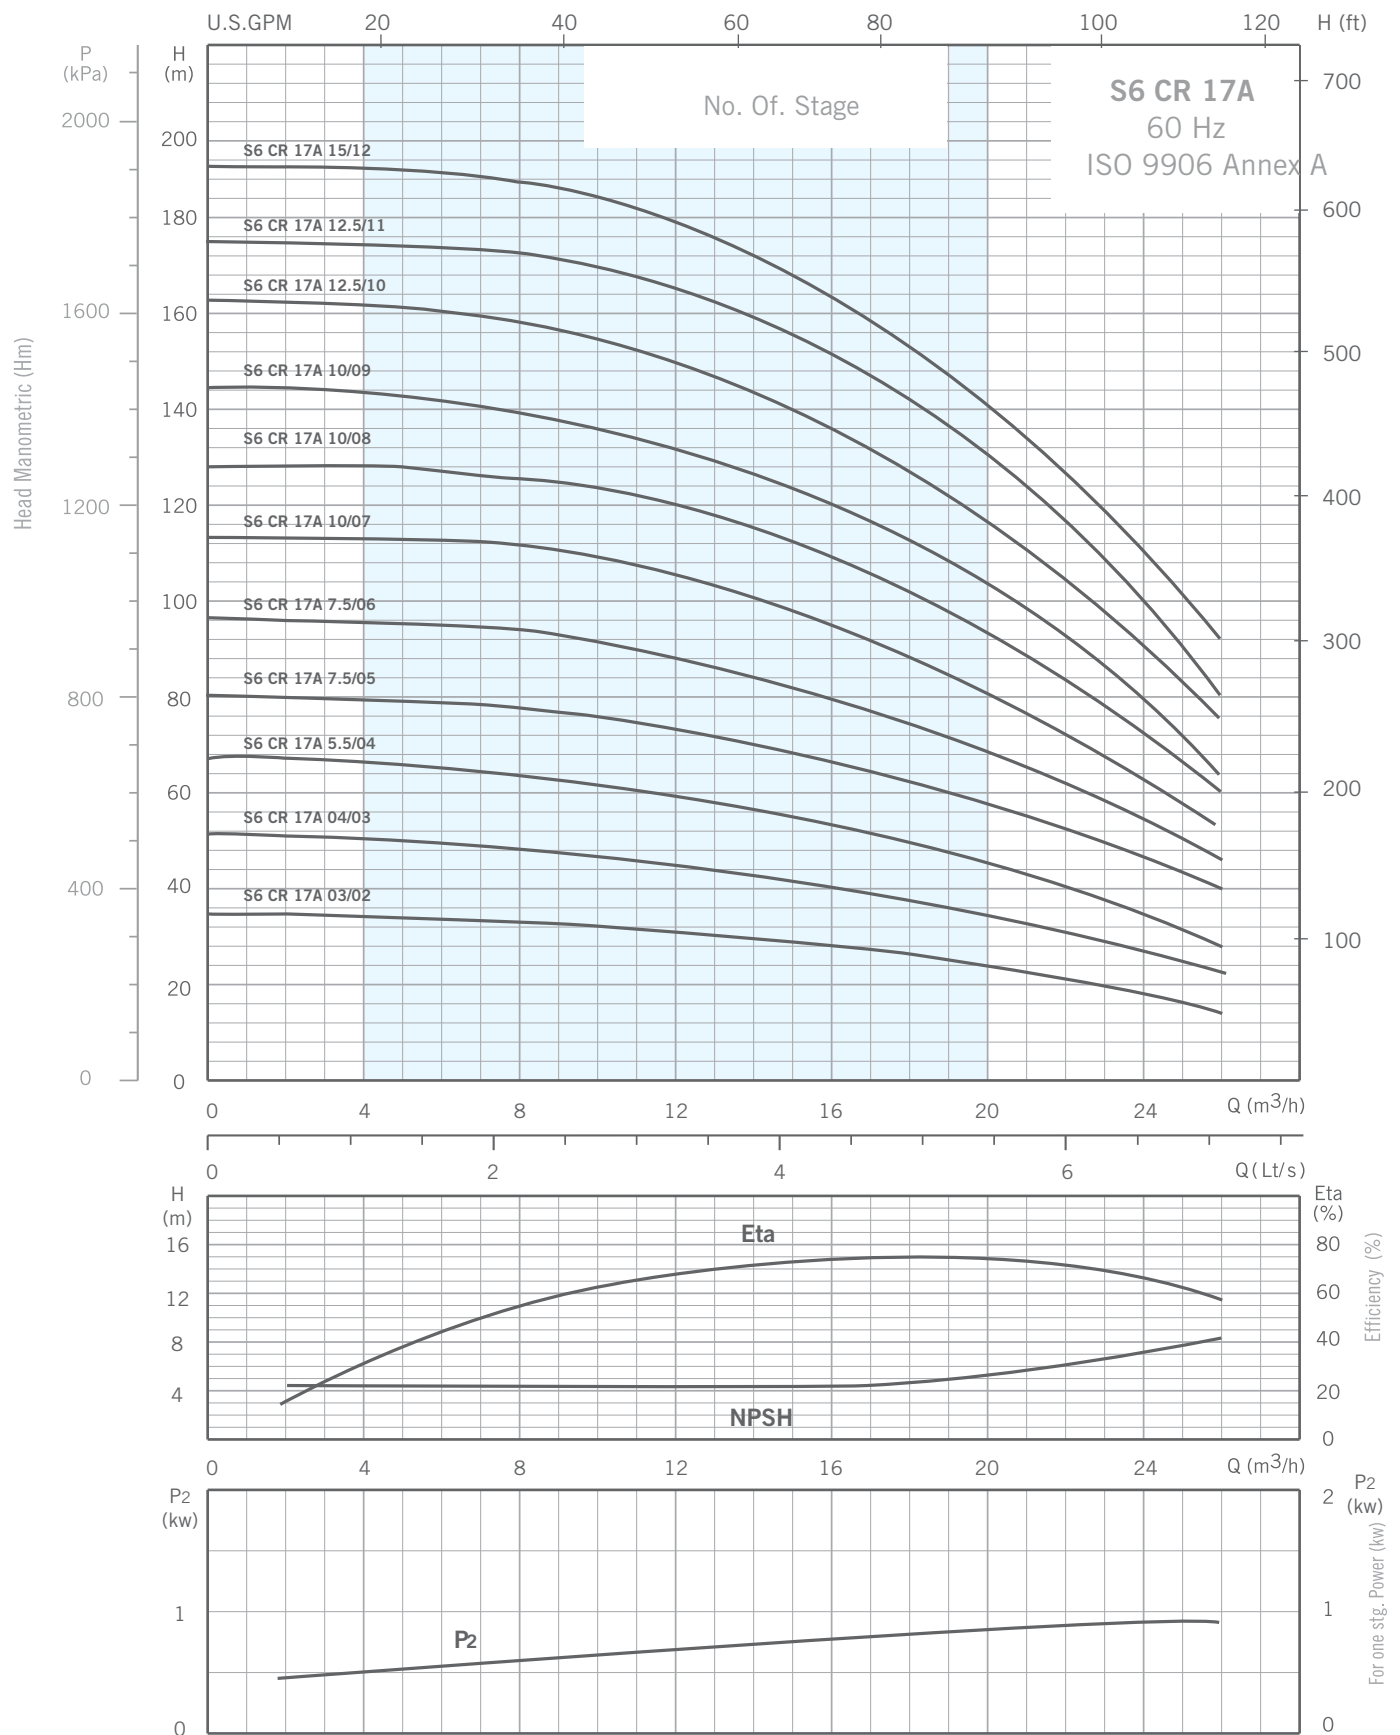

S6 CR 17 A

SERII POMPE INOX

